



■ Functions Instruction (For specific function, please refer to actual model)



Sensor distance, hold time, lux, lighting brightness can be adjusted by remote. (Rmote is a accessory will be sold separately, details can be checked from Remote Instruction)

Detection Area

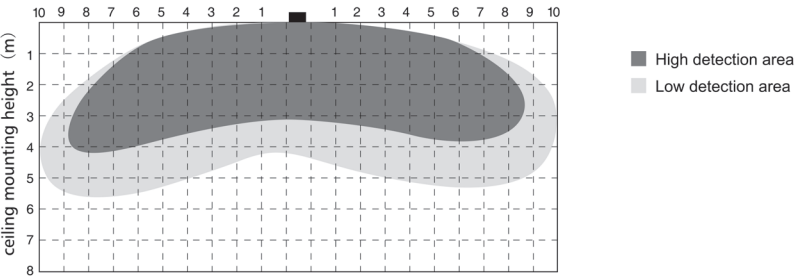

⦿ Ceiling Mounting pattern (Unit: m)

NOTE:

- 1. Do not install the luminaire near the large metal parts (metal sheet, pipe and net) or the place with strong radiation source and vibration.
- 2. The recommended installation height is 3M

Parameters specification

Functions	Control by Remote	Default setting
Microwave Sensor	ON/OFF	ON
Brightness setting	0%, 10%, 20%, 30%, 40%, 50%, 60%, 70%, 80%, 90%, 100%	100%
Sensor Hold Time	30S / 3min / 10min	30S
Sensor Distance	Near 2-4m / Medium 4-6m / Far 5-9m	Medium 4-6m
Daylight Sensor (Lux setting)	OFF / 50-100lux (Dusk) / 10-50lux (Night)	10-50lux (Night)
Stand By Brightness	OFF/ ON-10%, 20%, 30%	OFF
Input Voltage	AC100-240V 50Hz	
Sensor Power Factor	0.9	
Microwave Frequency	5.8G±75MHz	


Attention: The detective distance may be affected by operating environment, User's height, size and the speed of movement.

LEUCHTEK GmbH

Am Hopfenbach 12, 22926 Ahrensburg, Germany
www.leuchte.de | Tel.: +49 4102 7798707 | info@leuchte.de

LEUCHTEK®

LED CEILING LIGHT USER GUIDE

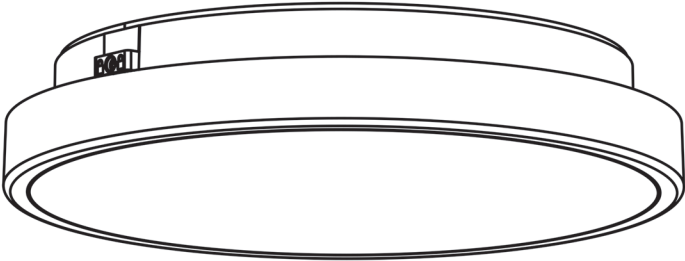

LED CEILING LIGHT USER GUIDE

Safety Instructions


To ensure correct function and safety, please read and follow all instructions carefully before using the product:

1. Turn off power supply before installation or before doing any maintenance work.
2. Do not install any luminaire near the heat source.
3. IP grade please refer to product label, only IP54 can be used in damp locations.
4. Do not exceed the nominal supply voltage or amperage ratings.
5. Dimmable version could be compatible with a wide range of recommended TRIAC dimmers.
6. All wiring and installation of the light fitting must adhere to local and national wiring rules.
7. Take care not to pull any electrical wires during unpacking as this may damage the connection.
8. Lay out all the components on a smooth surface and make sure there are no components missing before assembling.
9. To avoid injury or damage to the fitting, please ensure that power leads and screws are secure before connecting the power.
10. Please keep instructions for future reference.

Installation Procedure

WARNING


1. Switch off before installation.
2. Switch on only after complete installation and examination of the circuit.
3. Professional electrician for installation and maintenance only.



Turn Off power supply before starting any installation. Read instructions & check you have all the tools & accessories to complete the installation correctly.


Installation: Standard Version

Step 1




Take out ceiling light and accessory pack from box.

Step 2



Press the hasp to take out the bracket.


Step 3



Knock-in the plastic anchor into ceiling.
Fix bracket with screw into the ceiling.


Step 4

Only for CCT switchable version

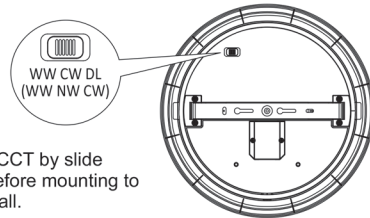


Choose CCT by slide switch before mounting to ceiling/wall.

Step 5




Remove the driver cover and line pressing clip, connect the wires correspondingly.

Step 6



Insert the lamp on the bracket, make sure the lamp fixed well.


Step 7

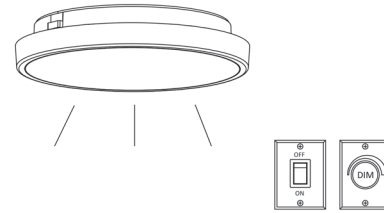

Switch on


Installation: Anti-theft Version

Step 1



Take out ceiling light and accessory pack from box.

Step 2



Press the hasp to take out the bracket.


Step 3



Knock-in the plastic anchor into ceiling.
Fix bracket with screw into the ceiling.


Step 4

Only for CCT switchable version

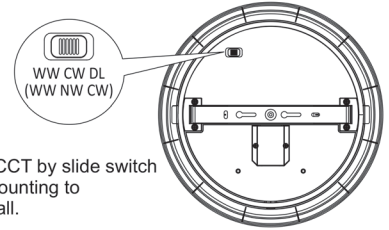


Choose CCT by slide switch before mounting to ceiling/wall.

Step 5



Remove the driver cover and line pressing clip, connect the wires correspondingly.

Step 6

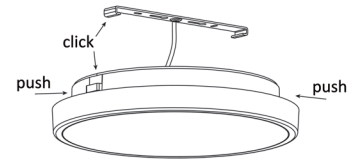

Insert the lamp on the bracket, make sure the lamp fixed well.

Step 7



Fix the anti-theft screws if needed.

Step 8

Switch on

