


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:219.5V I:0.2060A P:44.30W PF:-0.9780 Lamp Flux:5177.19x1 lm		
NAME: LED Tri-proof light	TYPE:1.5M 45W	WEIGHT:
DIM.: 1500	SPEC.:SL-P69F5-45-W	SERIAL No.:20190507012
MFR.: Shinelong Technology Corp., Ltd.	SUR.:1.435*0.07	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 116.87 lm/W			
MODEL	2835	I _{max} (cd)	1410	S/MH(C0/180)	1.26
NOMINAL POWER(W)	44.3	LOR(%)	100.0	S/MH(C90/270)	1.21
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	5177.2	η UP,DN(C0-180)	5.5,43.5
NOMINAL FLUX(lm)	5177.19	CIE CLASS	SEMI-D.	η UP,DN(C180-360)	6.1,45.0
LAMPS INSIDE	1	η up(%)	11.5	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	219.6	η down(%)	88.5	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

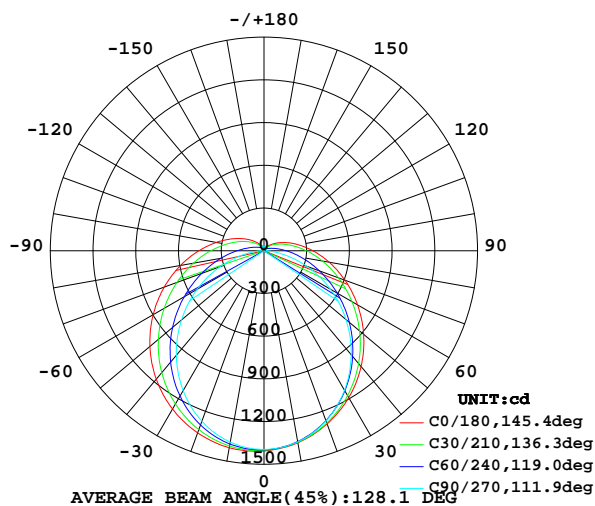

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

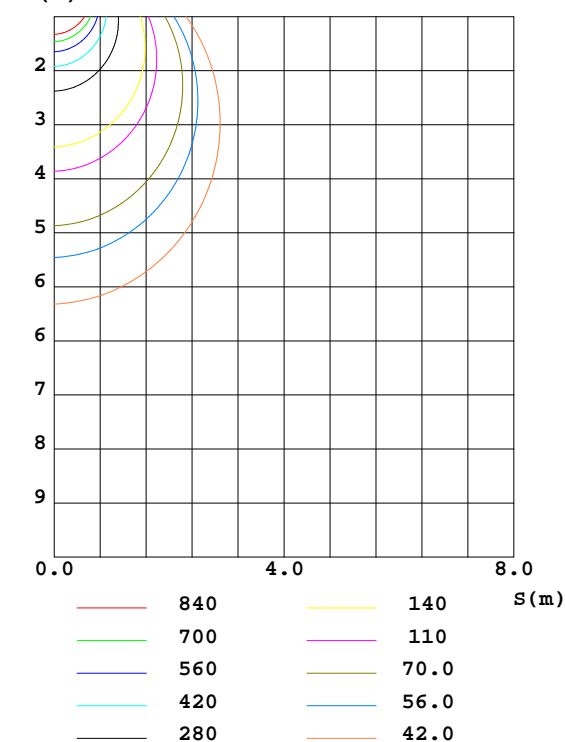

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:090003
 Test Date:2019-05-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:8.950m [K=1.0000]
 Remarks: 4000K RA80

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	$\%lum, lamp$
10	1370	1363	1363	1373	1405	1385	1365	1356	0- 10	132.1	132.1	2.55,2.55
20	1295	1279	1271	1306	1361	1320	1275	1275	10- 20	378.1	510.3	9.86,9.86
30	1191	1156	1131	1197	1284	1211	1136	1154	20- 30	573.3	1084	20.9,20.9
40	1061	1001	953.2	1054	1177	1068	957.7	1002	30- 40	695.0	1779	34.4,34.4
50	914.3	829.4	751.3	889.3	1046	903.6	757.8	832.6	40- 50	734.1	2513	48.5,48.5
60	758.1	653.1	537.3	715.4	898.4	728.3	543.4	656.9	50- 60	694.8	3207	62,62
70	606.0	486.3	320.4	546.9	744.9	558.1	327.8	490.4	60- 70	593.9	3801	73.4,73.4
80	464.6	341.0	124.1	396.5	595.4	405.0	130.6	344.5	70- 80	457.7	4259	82.3,82.3
90	343.6	226.8	17.41	275.7	458.4	282.1	20.47	229.9	80- 90	321.0	4580	88.5,88.5
100	245.6	148.0	18.71	187.6	340.9	192.2	19.72	144.1	90-100	218.1	4798	92.7,92.7
110	168.8	94.76	19.72	127.9	244.1	130.9	20.66	92.71	100-110	144.4	4943	95.5,95.5
120	111.4	61.47	21.52	87.50	170.4	89.11	22.02	60.56	110-120	92.87	5035	97.3,97.3
130	70.93	40.47	23.44	60.64	114.4	61.29	23.47	40.07	120-130	57.87	5093	98.4,98.4
140	45.20	31.01	26.08	43.69	74.25	43.94	25.44	31.12	130-140	35.31	5129	99.1,99.1
150	31.96	28.99	28.64	34.40	48.19	34.30	27.92	29.05	140-150	22.33	5151	99.5,99.5
160	28.95	29.83	30.79	30.91	34.55	30.71	30.40	29.81	150-160	14.48	5165	99.8,99.8
170	30.34	31.37	32.66	31.28	31.15	31.18	32.55	31.48	160-170	8.743	5174	99.9,99.9
180	31.50	32.41	33.73	32.49	31.59	32.41	33.68	32.50	170-180	3.044	5177	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:090003
 Test Date:2019-05-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 γ Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:8.950m [K=1.0000]
 Remarks: 4000K RA80

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:219.5V I:0.2060A P:44.30W PF:-0.9780 Lamp Flux:5177.19x1 lm		
NAME: LED Tri-proof light	TYPE:1.5M 45W	WEIGHT:
DIM.: 1500	SPEC.:SL-P69F5-45-W	SERIAL No.:20190507012
MFR.: Shinelong Technology Corp., Ltd.	SUR.:1.435*0.07	PROTECTION ANGLE:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
0.0	1.16	1.16	1.16	1.12	1.12	1.12	1.05	1.05	1.05	.98	.98	.98	.91	.91	.91	.88
1.0	.98	.93	.89	.95	.90	.86	.88	.85	.81	.82	.79	.77	.77	.75	.72	.69
2.0	.84	.77	.71	.82	.75	.69	.76	.70	.65	.71	.66	.62	.66	.63	.59	.56
3.0	.74	.65	.58	.71	.63	.57	.66	.60	.54	.62	.56	.52	.58	.53	.49	.47
4.0	.65	.56	.49	.63	.54	.48	.59	.51	.46	.55	.49	.44	.52	.46	.42	.39
5.0	.58	.48	.41	.56	.47	.41	.52	.45	.39	.49	.43	.38	.46	.41	.36	.34
6.0	.52	.43	.36	.50	.42	.35	.47	.40	.34	.44	.38	.33	.42	.36	.32	.29
7.0	.47	.38	.32	.46	.37	.31	.43	.35	.30	.40	.34	.29	.38	.32	.28	.26
8.0	.43	.34	.28	.41	.33	.28	.39	.32	.27	.37	.31	.26	.35	.29	.25	.23
9.0	.39	.31	.25	.38	.30	.25	.36	.29	.24	.34	.28	.23	.32	.27	.23	.21
10.0	.36	.28	.23	.35	.27	.22	.33	.26	.22	.32	.25	.21	.30	.24	.20	.19

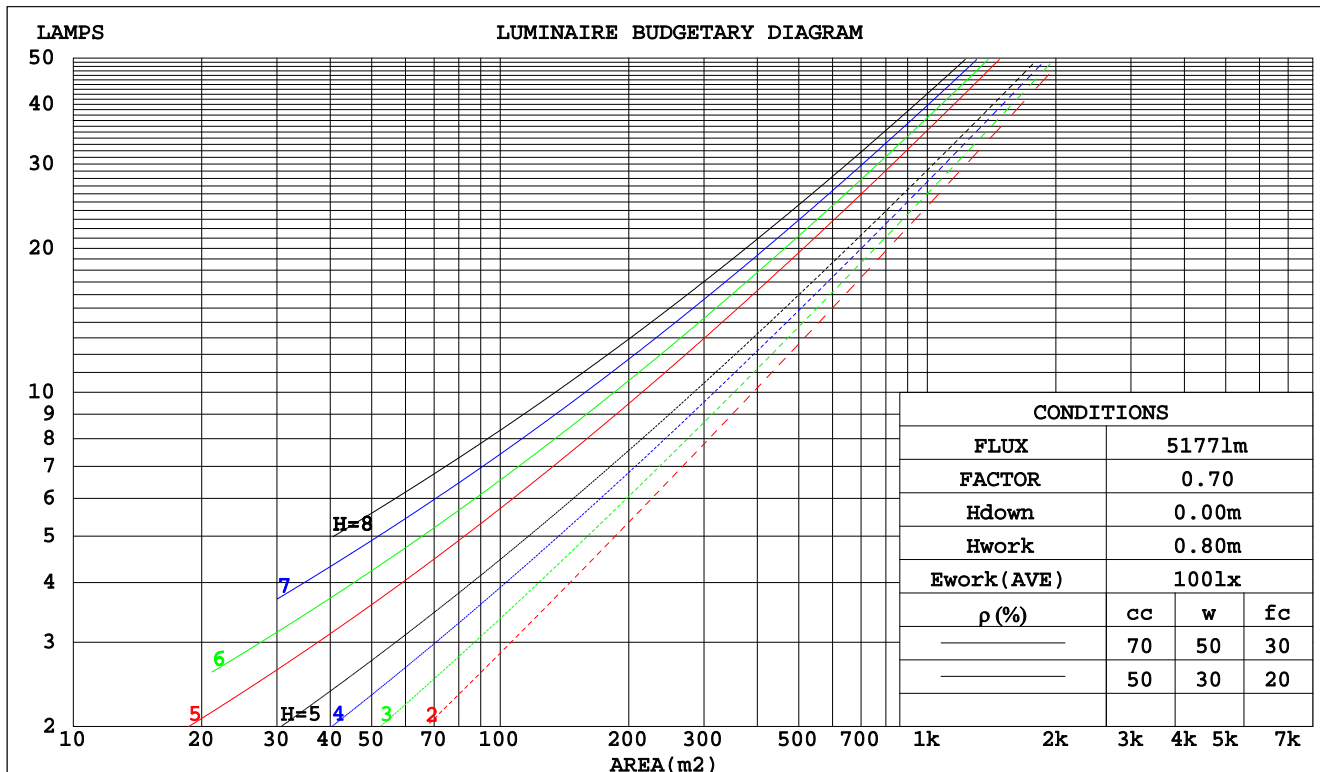

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25DEG
 Operators: 090003
 Test Date: 2019-05-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.276
 Humidity: 65.0%
 Test Distance: 8.950m [K=1.0000]
 Remarks: 4000K RA80

WEC AND CCEC

Test:U:219.5V I:0.2060A P:44.30W PF:-0.9780 Lamp Flux:5177.19x1 lm		
NAME: LED Tri-proof light	TYPE:1.5M 45W	WEIGHT:
DIM.: 1500	SPEC.:SL-P69F5-45-W	SERIAL No.:20190507012
MFR.: Shinelong Technology Corp., Ltd.	SUR.:1.435*0.07	PROTECTION ANGLE:

pcc	80%			70%			50%			30%			10%			0	
p _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
p _{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.366	.208	.066	.355	.203	.064	.335	.192	.061	.317	.183	.059	.300	.174	.056		
2.0	.322	.177	.054	.313	.172	.053	.294	.164	.051	.278	.156	.049	.262	.148	.047		
3.0	.289	.154	.046	.280	.150	.045	.264	.143	.043	.249	.136	.042	.235	.130	.040		
4.0	.262	.136	.040	.254	.133	.039	.239	.127	.038	.226	.121	.037	.213	.116	.035		
5.0	.239	.122	.035	.232	.119	.035	.219	.114	.033	.206	.109	.032	.195	.104	.031		
6.0	.219	.110	.031	.213	.108	.031	.201	.103	.030	.190	.099	.029	.179	.094	.028		
7.0	.203	.100	.028	.197	.098	.028	.186	.094	.027	.176	.090	.026	.166	.086	.025		
8.0	.189	.092	.026	.183	.090	.026	.173	.087	.025	.164	.083	.024	.155	.080	.023		
9.0	.176	.085	.024	.171	.083	.023	.162	.080	.023	.154	.077	.022	.145	.074	.021		
10.0	.165	.079	.022	.161	.078	.022	.152	.075	.021	.144	.072	.020	.137	.069	.020		

pcc	80%			70%			50%			30%			10%			0
p _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
p _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.278	.278	.278	.238	.238	.238	.162	.162	.162	.093	.093	.093	.030	.030	.030	
1.0	.273	.244	.219	.233	.210	.188	.160	.144	.130	.092	.083	.076	.029	.027	.024	
2.0	.265	.221	.184	.227	.190	.159	.156	.132	.111	.090	.077	.065	.029	.025	.021	
3.0	.258	.204	.161	.221	.176	.140	.152	.122	.098	.088	.071	.058	.028	.023	.019	
4.0	.250	.191	.147	.214	.165	.127	.148	.115	.090	.085	.067	.053	.027	.022	.017	
5.0	.242	.181	.136	.208	.157	.119	.143	.110	.084	.083	.064	.050	.027	.021	.016	
6.0	.235	.173	.129	.202	.150	.112	.139	.105	.079	.081	.062	.047	.026	.020	.016	
7.0	.228	.167	.124	.196	.144	.108	.135	.101	.076	.079	.060	.045	.025	.020	.015	
8.0	.221	.161	.119	.190	.140	.104	.132	.098	.074	.077	.058	.044	.025	.019	.015	
9.0	.215	.156	.116	.185	.135	.101	.128	.095	.072	.075	.056	.043	.024	.018	.014	
10.0	.209	.152	.114	.180	.132	.099	.125	.093	.070	.073	.055	.042	.024	.018	.014	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:090003
 Test Date:2019-05-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:8.950m [K=1.0000]
 Remarks: 4000K RA80

Uncorrected UGR Table

Test:U:219.5V I:0.2060A P:44.30W PF:-0.9780 Lamp Flux:5177.19x1 lm											
NAME: LED Tri-proof light					TYPE:1.5M 45W			WEIGHT:			
DIM.: 1500					SPEC.:SL-P69F5-45-W			SERIAL No.:20190507012			
MFR.: Shinelong Technology Corp., Ltd.					SUR.:1.435*0.07			PROTECTION ANGLE:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	2H	21.5	22.9	21.9	23.3	23.7	20.1	21.5	20.5	21.9	22.3
	3H	23.7	25.0	24.2	25.5	26.0	21.5	22.8	22.0	23.3	23.8
	4H	24.9	26.2	25.4	26.7	27.2	22.1	23.3	22.6	23.8	24.3
	6H	26.3	27.5	26.8	27.9	28.5	22.5	23.7	23.0	24.1	24.7
	8H	27.0	28.2	27.5	28.6	29.2	22.6	23.8	23.1	24.2	24.8
	12H	27.9	29.0	28.4	29.5	30.0	22.7	23.8	23.2	24.3	24.8
4H	2H	22.0	23.3	22.5	23.7	24.2	21.0	22.2	21.4	22.7	23.2
	3H	24.5	25.6	25.0	26.1	26.7	22.6	23.7	23.2	24.2	24.8
	4H	25.9	26.9	26.5	27.5	28.0	23.4	24.4	23.9	24.9	25.5
	6H	27.5	28.4	28.0	28.9	29.5	24.0	24.9	24.5	25.4	26.0
	8H	28.3	29.2	28.9	29.7	30.4	24.2	25.0	24.8	25.6	26.2
	12H	29.3	30.1	29.9	30.7	31.3	24.3	25.1	24.9	25.7	26.3
8H	4H	26.2	27.1	26.8	27.7	28.3	24.1	25.0	24.7	25.6	26.2
	6H	28.1	28.8	28.7	29.4	30.1	25.1	25.8	25.7	26.4	27.0
	8H	29.1	29.8	29.8	30.4	31.1	25.5	26.1	26.1	26.7	27.4
	12H	30.4	30.9	31.0	31.6	32.3	25.8	26.3	26.4	27.0	27.7
12H	4H	26.3	27.0	26.9	27.6	28.3	24.4	25.2	25.0	25.7	26.4
	6H	28.2	28.8	28.8	29.5	30.1	25.5	26.1	26.1	26.7	27.4
	8H	29.4	29.9	30.0	30.6	31.3	26.0	26.6	26.7	27.2	27.9
Variations with the observer position at spacings:											
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.2					
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.4					

CIE Pub.117 Corrected 5177 lm Total Lamp Luminous Flux.(8log(F/F0) = 5.7)

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:090003
 Test Date:2019-05-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:8.950m [K=1.0000]
 Remarks: 4000K RA80

UTILIZATION FACTORS TABLE

Test:U:219.5V I:0.2060A P:44.30W PF:-0.9780 Lamp Flux:5177.19x1 lm		
NAME: LED Tri-proof light	TYPE:1.5M 45W	WEIGHT:
DIM.: 1500	SPEC.:SL-P69F5-45-W	SERIAL No.:20190507012
MFR.: Shinelong Technology Corp., Ltd.	SUR.:1.435*0.07	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	51	39	32	50	39	32	49	38	31	25
0.80	61	48	40	59	47	40	57	46	39	32
1.00	69	56	48	67	55	48	64	56	47	39
1.25	75	63	55	73	62	55	70	60	53	45
1.50	80	69	61	78	68	60	74	65	58	49
2.00	88	77	69	85	75	68	80	72	66	56
2.50	92	82	75	89	80	73	84	76	71	60
3.00	95	87	80	92	85	78	87	80	75	63
4.00	100	93	87	97	90	84	90	85	81	68
5.00	103	96	91	99	94	89	93	88	84	71
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:090003
 Test Date:2019-05-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 γ Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:8.950m [K=1.0000]
 Remarks: 4000K RA80

ISOCANDELA DIAGRAM

Test:U:219.5V I:0.2060A P:44.30W PF:-0.9780 Lamp Flux:5177.19x1 lm		
NAME: LED Tri-proof light	TYPE:1.5M 45W	WEIGHT:
DIM.: 1500	SPEC.:SL-P69F5-45-W	SERIAL No.:20190507012
MFR.: Shinelong Technology Corp., Ltd.	SUR.:1.435*0.07	PROTECTION ANGLE:

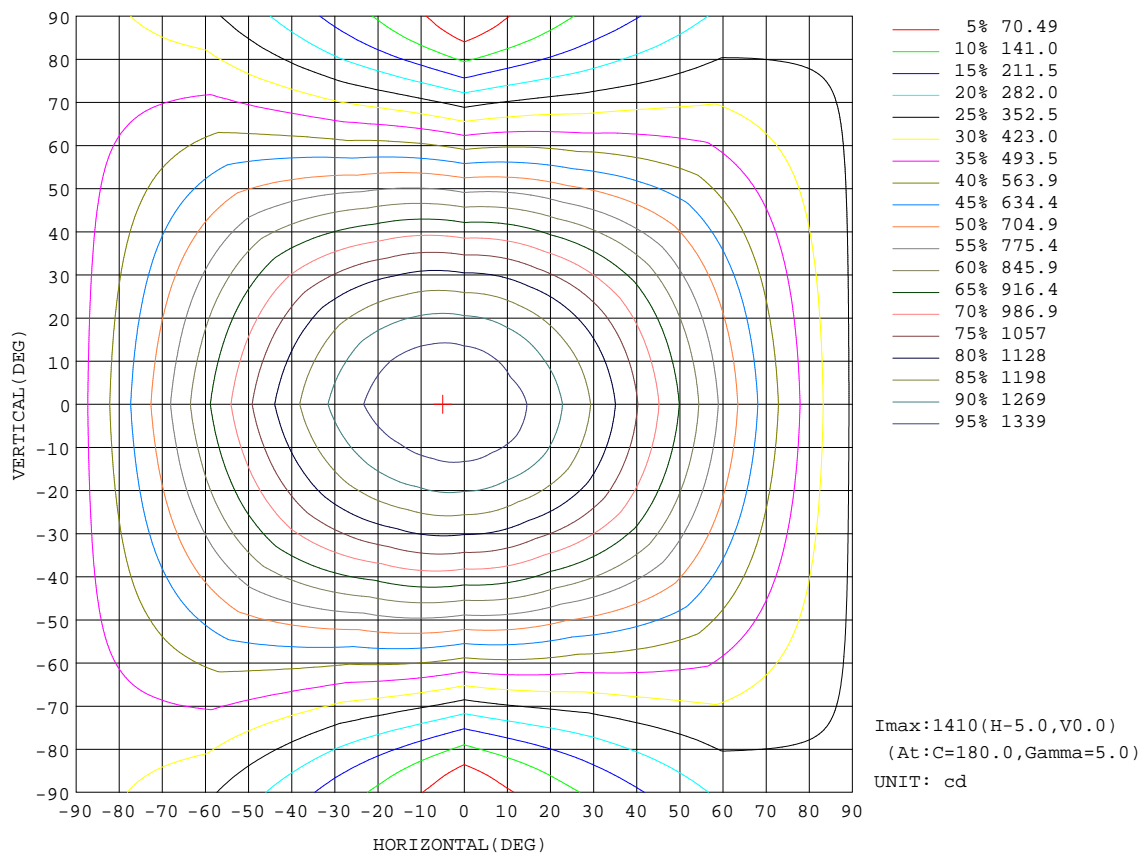


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25DEG
Operators:090003
Test Date:2019-05-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.276
Humidity:65.0%
Test Distance:8.950m [K=1.0000]
Remarks: 4000K RA80

AAI Figure

Test:U:219.5V I:0.2060A P:44.30W PF:-0.9780 Lamp Flux:5177.19x1 lm		
NAME: LED Tri-proof light	TYPE:1.5M 45W	WEIGHT:
DIM.: 1500	SPEC.:SL-P69F5-45-W	SERIAL No.:20190507012
MFR.: Shinelong Technology Corp., Ltd.	SUR.:1.435*0.07	PROTECTION ANGLE:

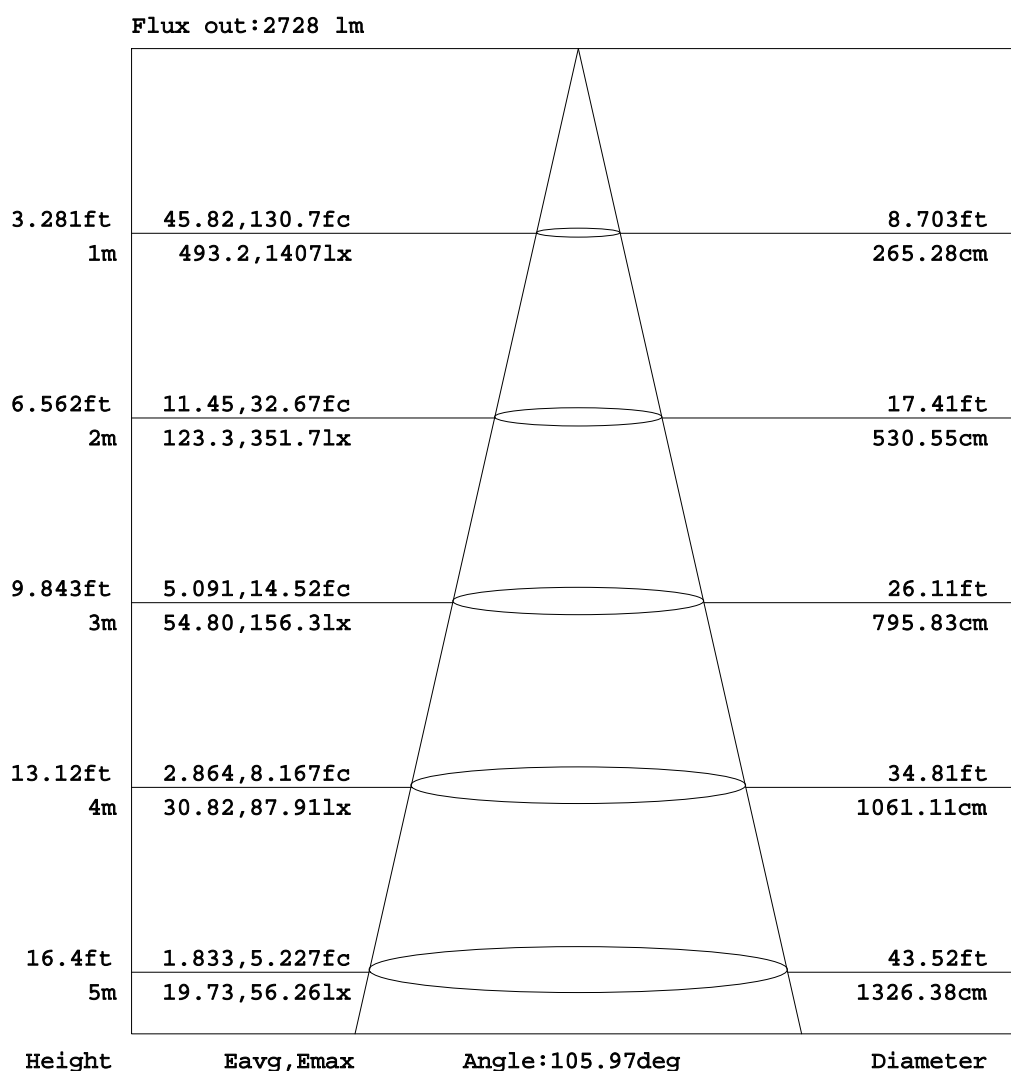


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25DEG
Operators:090003
Test Date:2019-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.276
Humidity:65.0%
Test Distance:8.950m [K=1.0000]
Remarks: 4000K RA80

ISOLUX DIAGRAM


Test:U:219.5V I:0.2060A P:44.30W PF:-0.9780 Lamp Flux:5177.19x1 lm		
NAME: LED Tri-proof light	TYPE:1.5M 45W	WEIGHT:
DIM.: 1500	SPEC.:SL-P69F5-45-W	SERIAL No.:20190507012
MFR.: Shinelong Technology Corp., Ltd.	SUR.:1.435*0.07	PROTECTION ANGLE:

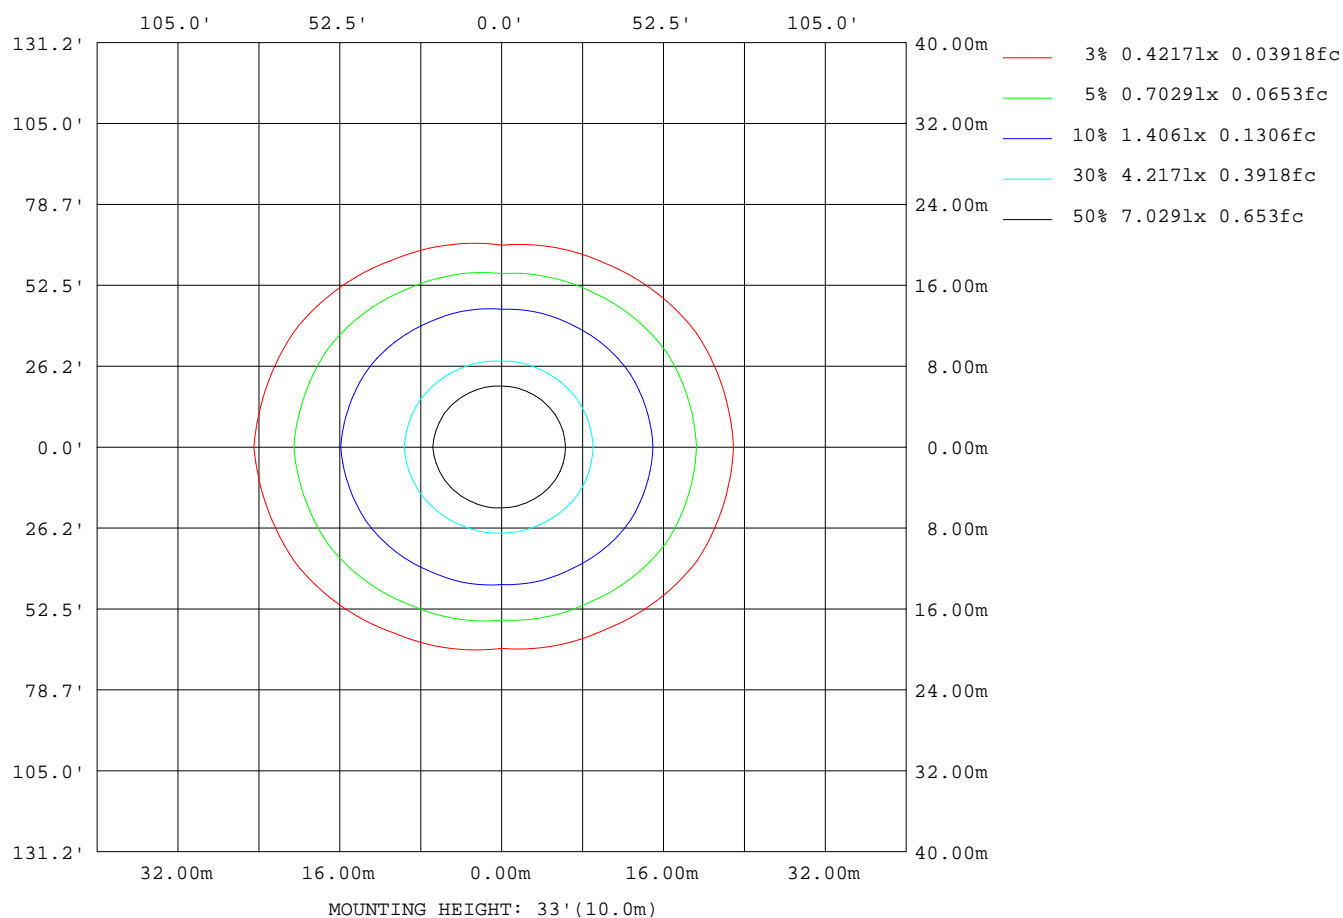

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25DEG
 Operators: 090003
 Test Date: 2019-05-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.276
 Humidity: 65.0%
 Test Distance: 8.950m [K=1.0000]
 Remarks: 4000K RA80

Planar Illuminance Curve

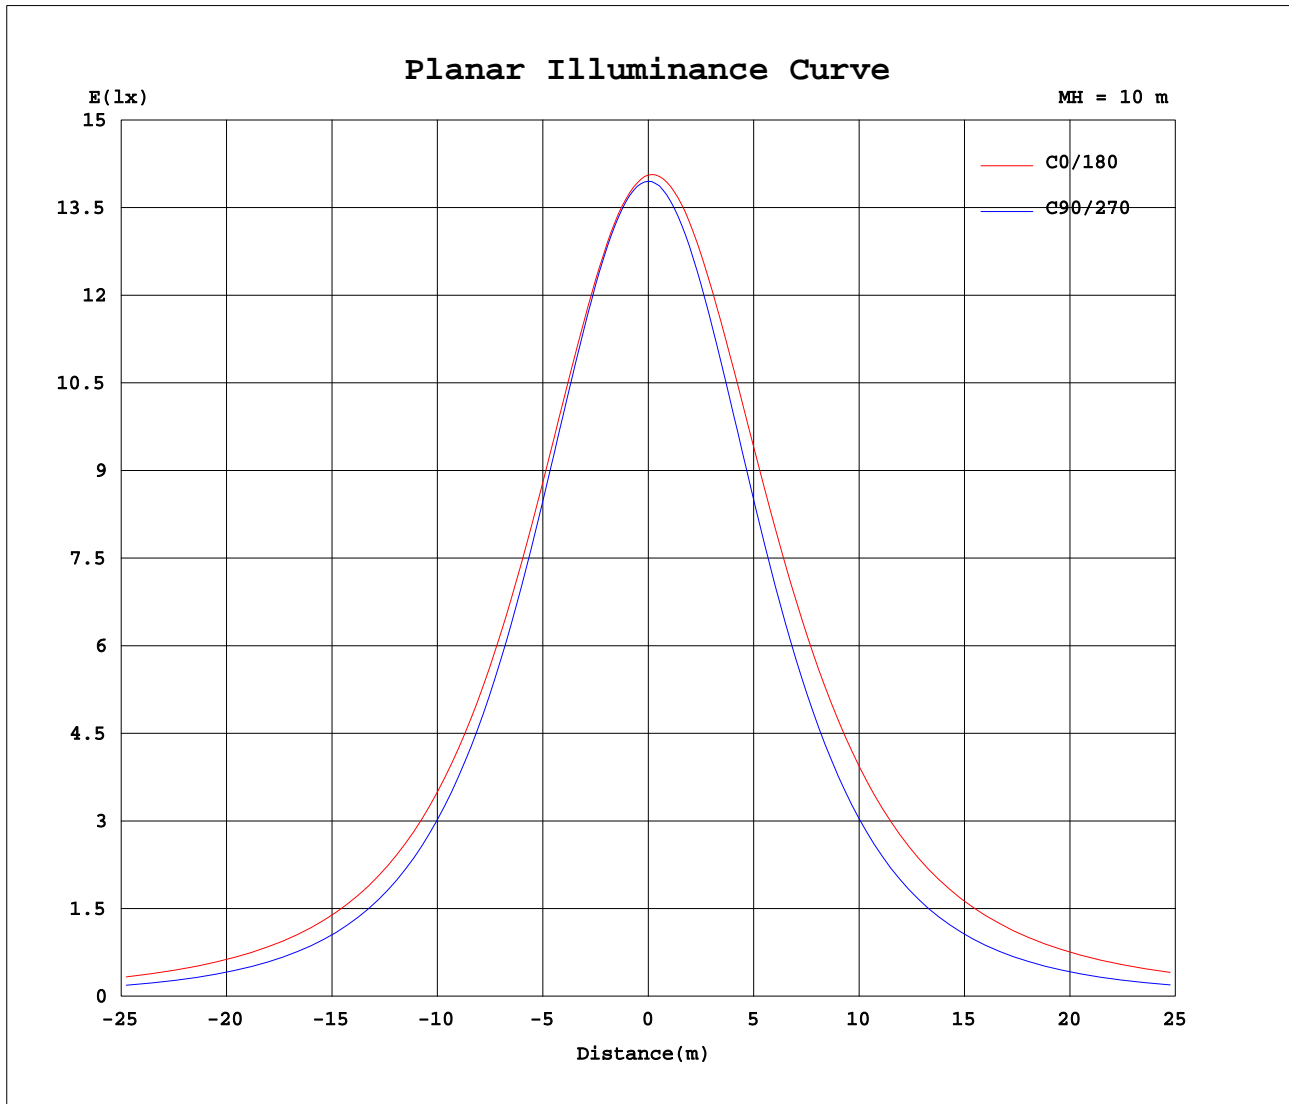

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25DEG
Operators: 090003
Test Date: 2019-05-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.276
Humidity: 65.0%
Test Distance: 8.950m [K=1.0000]
Remarks: 4000K RA80

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.5V I:0.2060A P:44.30W PF:-0.9780 Lamp Flux:5177.19x1 lm																	
NAME: LED Tri-proof light									TYPE:1.5M 45W			WEIGHT:					
DIM.: 1500									SPEC.:SL-P69F5-45-W			SERIAL No.:20190507012					
MFR.: Shinelong Technology Corp., Ltd.									SUR.:1.435*0.07			PROTECTION ANGLE:					

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1406	1402	1398	1395	1392	1389	1406	1402	1398	1395	1392	1389						
5	1392	1389	1386	1387	1388	1389	1410	1403	1395	1388	1383	1376						
10	1370	1366	1361	1363	1368	1378	1405	1392	1378	1365	1359	1353						
15	1336	1332	1322	1324	1335	1355	1388	1370	1347	1327	1322	1321						
20	1295	1288	1270	1271	1289	1322	1361	1337	1302	1275	1272	1278						
25	1246	1235	1208	1207	1232	1280	1326	1294	1246	1211	1212	1226						
30	1191	1175	1136	1131	1165	1229	1284	1244	1179	1136	1141	1166						
35	1129	1107	1055	1046	1088	1169	1234	1183	1104	1050	1062	1099						
40	1061	1034	968	953	1004	1103	1177	1116	1020	958	977	1027						
45	989	957	877	855	916	1032	1114	1045	931	860	886	951						
50	914	876	783	751	823	956	1046	969	838	758	793	872						
55	836	795	687	646	727	878	974	889	743	651	698	791						
60	758	713	593	537	633	798	898	809	647	543	604	710						
65	681	633	502	428	540	718	822	729	554	435	512	632						
70	606	557	416	320	453	641	745	651	465	328	425	556						
75	533	484	336	216	371	566	669	575	383	224	346	483						
80	465	417	265	124	297	496	595	502	308	131	273	416						
85	401	355	205	53.8	234	429	524	435	243	57.7	212	354						
90	344	298	156	17.4	183	369	458	374	190	20.5	162	298						
95	292	249	118	17.8	142	313	397	319	148	19.4	123	249						
100	246	206	89.9	18.7	111	264	341	269	115	19.7	90.4	198						
105	205	169	68.0	18.8	88.0	222	289	226	91.2	20.0	68.3	161						
110	169	138	51.8	19.7	71.1	185	244	189	73.3	20.7	52.8	133						
115	138	111	40.7	20.6	58.4	153	205	156	60.0	21.4	41.3	108						
120	111	89.4	33.6	21.5	49.1	126	170	128	50.0	22.0	34.3	86.8						
125	89.2	71.3	29.6	22.5	42.1	103	140	105	42.6	22.7	30.2	69.2						
130	70.9	53.4	27.6	23.4	37.2	84.1	114	85.4	37.2	23.5	28.0	52.1						
135	56.4	41.9	26.8	24.5	33.7	68.4	92.6	69.5	33.4	24.4	27.0	41.2						
140	45.2	35.3	26.7	26.1	31.5	55.9	74.3	56.9	31.0	25.4	27.0	35.2						
145	37.1	31.6	27.5	27.3	30.3	46.2	59.6	46.9	29.6	26.7	27.5	31.8						
150	32.0	29.5	28.5	28.6	29.8	39.0	48.2	39.7	28.9	27.9	28.5	29.6						
155	29.4	28.8	29.5	29.7	29.9	34.1	39.9	34.6	29.1	29.2	29.5	28.8						
160	28.9	29.2	30.5	30.8	30.5	31.3	34.5	31.7	29.7	30.4	30.6	29.1						
165	29.5	29.9	31.3	31.8	31.3	30.2	31.8	30.6	30.6	31.5	31.5	29.7						
170	30.3	30.7	32.1	32.7	32.2	30.3	31.2	30.6	31.7	32.6	32.4	30.5						
175	31.1	31.4	32.7	33.4	33.0	31.0	31.5	31.3	32.6	33.3	33.2	31.2						
180	31.5	31.8	33.0	33.7	33.5	31.5	31.6	31.7	33.1	33.7	33.6	31.5						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:090003
 Test Date:2019-05-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.276
 Humidity:65.0%
 Test Distance:8.950m [K=1.0000]
 Remarks: 4000K RA80